
Silitex®

High technology emulsion

PAINT & COATING ADDITIVES

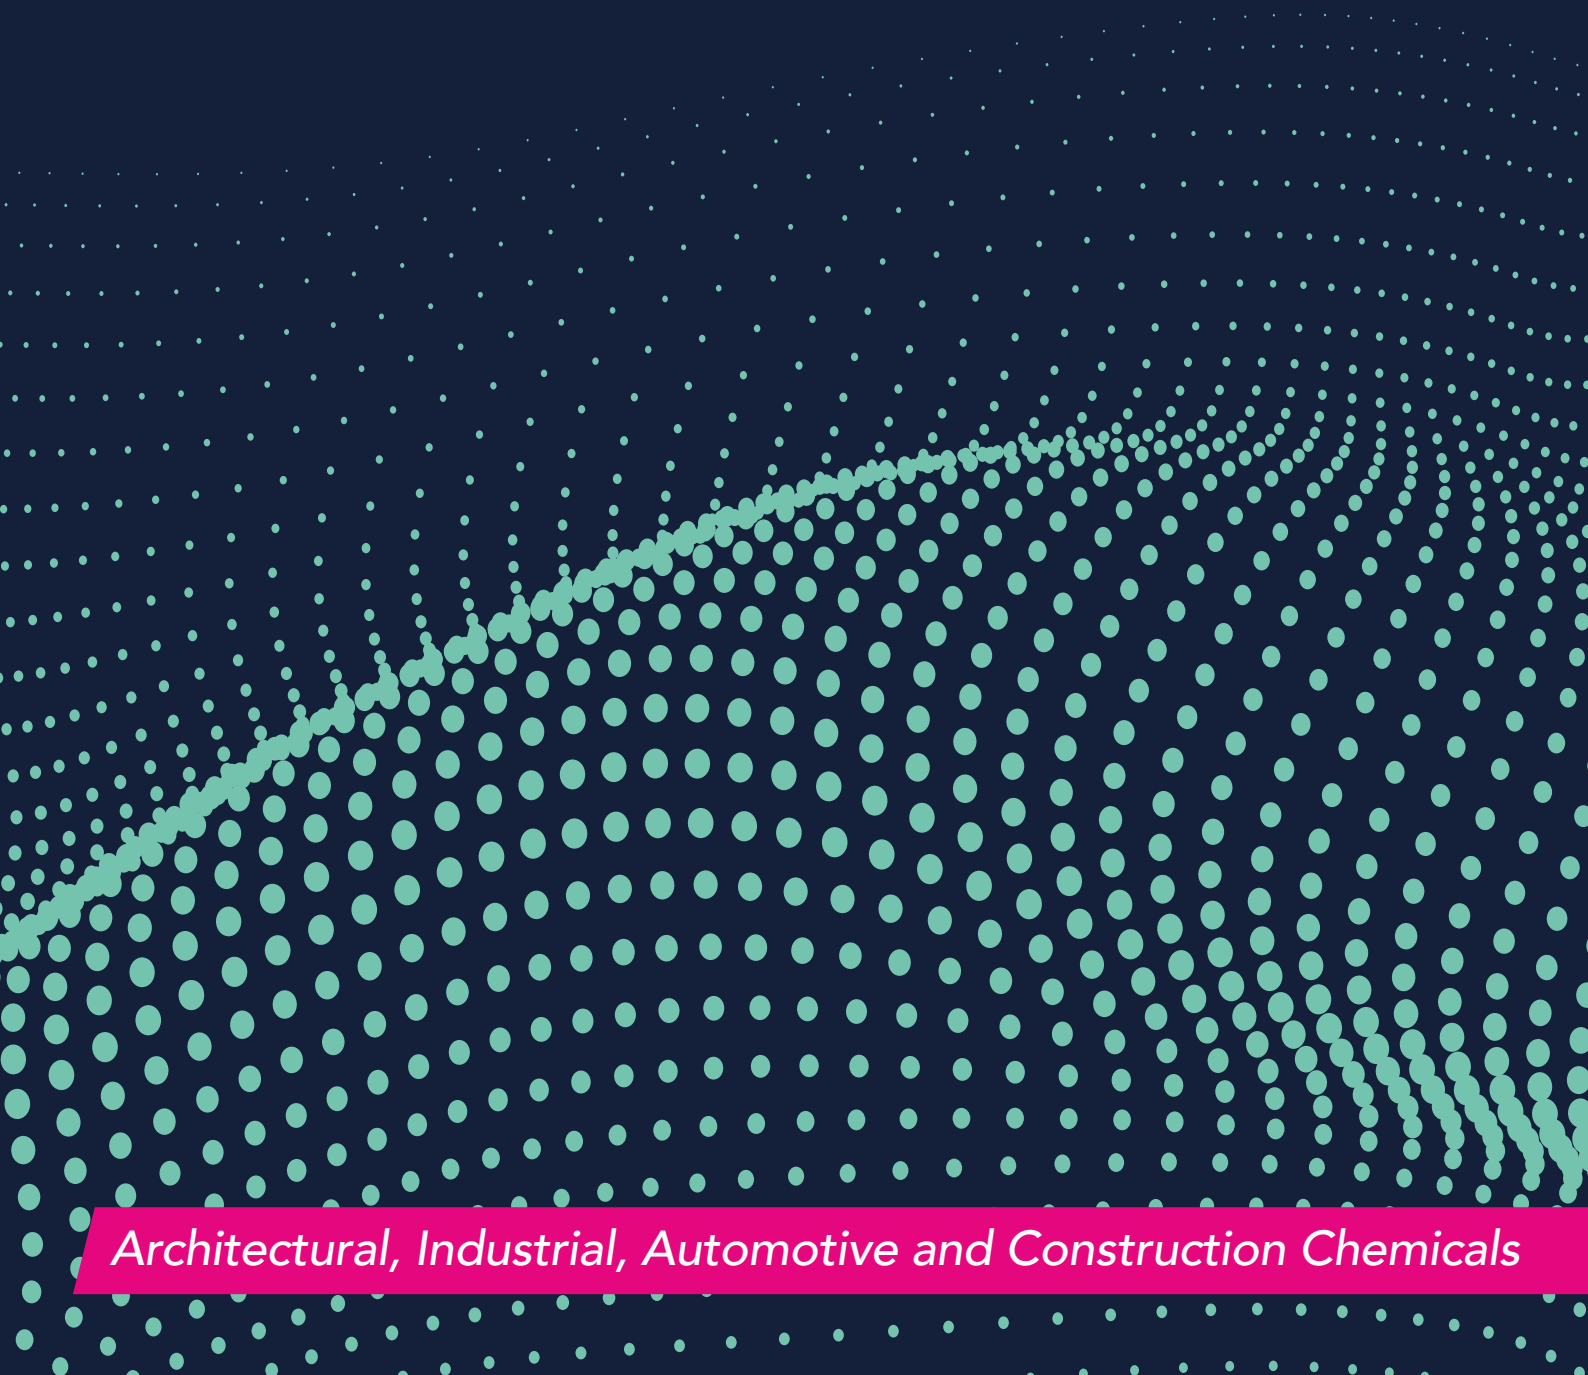

Architectural, Industrial, Automotive and Construction Chemicals

Silitex®

High technology emulsion

INDEX

PRODUCT LINE

Modified polyether silicone antifoams and de-aerating agents in water emulsion	pag.	4
Modified polyether silicone antifoams and de-aerating agents at 100% active	pag.	6
Silicone free antifoams in water emulsion	pag.	8
Hydrocarbons based antifoams at 100% active	pag.	10
Powder antifoams	pag.	12
ECO FRIENDLY antifoams in water emulsion and 100 % active	pag.	14
Antifoams for solvent based systems	pag.	16
Hydrorepellents	pag.	18
Waxes in water emulsion	pag.	20
Silicone resins for high temperature	pag.	22
Silicone free antifoams for glues	pag.	22
Wetting - levelling - surface tension modifiers antifoams	pag.	22
Care care	pag.	24

ANTIFOAMS AND DEAERATORS

ANTIFOAMS AND DE-AERATING ADDITIVES BASED ON POLYETHER SILICONE - WATER BASED EMULSIONS

PRODUCT	APPEARANCE	ACTIVE MATERIAL	% ACTIVE	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY OF SYSTEM	PVC TO TREAT	SYSTEMS TO TREAT	FEATURES
DYNAWEED 130 E	Emulsion	Modified silicone	13	Water-based	High	Medium	Medium / high	Medium / high	Resins: acrylic / styrene-acrylic / vinyl	Very stable antifoam and levelling. Suitable to prevent the formation of micro and macro foam in both paints and varnishes.
DYNAWEED 150 E	Emulsion	Modified silicone	15	Water-based	High	Medium	Low / medium / high	Medium / high	Resins: acrylic / styrene-acrylic / vinyl	Very stable antifoam and levelling. Suitable to prevent the formation of micro and macro foam in both paints and varnishes.
DYNAWEED 260 E	Emulsion	Modified silicone	26	Water-based	High	Medium / high	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl / polyurethane	Very stable antifoam and levelling. Suitable to prevent the formation of micro and macro foam in enamels, paints, varnishes, glues and pigment pastes.
DYNAWEED 260 SE	Emulsion	Modified silicone	26	Water-based	High	High	Medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl-polyvinylacetate	Very stable antifoam and de-aerating. Suitable to prevent the formation of macro-foam in paints, varnishes, glues, printing and pigment pastes.
DYNAWEED 550 E	Emulsion	Modified silicone	55	Water-based	High	High	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl / polyurethane	High concentration antifoam and levelling. Suitable to prevent the formation of micro and macro foam in paints, varnishes, glues, pigment pastes and printing inks.
DYNAWEED 600 E	Emulsion	Modified silicone	60	Water-based	High	High	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl / polyurethane	High concentration antifoam and levelling. Suitable to prevent the formation of micro and macro foam in paints, varnishes, glues, pigment pastes. Effective at low dosage.
SILIWEED 260 E	Emulsion	Modified silicone	26	Water-based	High	Medium / high	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl / polyurethane	Antifoam for water based varnishes, rotogravure and flexo inks, paints for forniture, parquet, plastics, leather finishing process.

ANTIFOAMS AND DEAERATORS

ANTIFOAMS AND DE-AERATING ADDITIVES BASED ON POLYETHER SILICONE - **100% ACTIVE** SELF-EMULSIFYING IN WATER

PRODUCT	APPEARANCE	ACTIVE MATERIAL	% ACTIVE	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY OF SYSTEM	PVC TO TREAT	SYSTEMS TO TREAT	FEATURES
DYNAWEED MS	Compound	Silicone	100	Water-based	Medium	Very high	Medium / high	Low / medium	Resins: acrylic / styrene-acrylic / vinyl-polyvinyl acetate	Strong antifoam and de-aerating. Suitable for emulsions of polyvinyl acetate or based on pure resins.
DYNAWEED 100	Compound	Modified silicone	100	Water-based	Medium	High	Medium / high	Low / medium	Resins: acrylic / styrene-acrylic / vinyl-polyvinyl acetate	Strong antifoam and de-aerating. Suitable for emulsions of polyvinyl acetate, emulsions based on pure acryl resin, or printing pastes.
DYNAWEED 400	Compound	Modified silicone	100	Water-based	Medium / high	High	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl-polyvinyl acetate	Antifoam and de-aerating with high self-emulsifying behavior. Suitable for hydro paints, glues, manufacturing of wax emulsions and printing inks.
DYNAWEED 200	Compound	Modified silicone	100	Water-based	High	Medium	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl-polyvinyl acetate	Antifoam showing high self-emulsifying behavior. Suitable to prevent micro and macro-foam. It is suitable for glues, wax and emulsions production.
DYNAWEED 201	Fluid	Modified silicone	100	Water-based	High	High	Low / medium / high	Low / medium / high	Resins: acrylic / styrene-acrylic / vinyl / concentrate and pigment pastes	Antifoam and levelling of new generation. Very suitable for printing inks, flexo and rotogravure.
DYNAWOOD 100	Compound	Modified silicone	100	Water-based	High	Medium / high	Low / medium / high	Low / high	Paints and varnishes for wood	Antifoam suitable paints and varnishes for wood.

ANTIFOAMS AND DEAERATORS

SILICONE FREE ANTIFOAMS - WATER BASED EMULSIONS

PRODUCT	APPEARANCE	ACTIVE MATERIAL	% ACTIVE	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY OF SYSTEM	PVC TO TREAT	SYSTEMS TO TREAT	FEATURES
BRILAX	Emulsion	Hydrocarbons	24	Water-based	High	Medium	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam very stable also in systems with very low viscosity, easy to use and incorporate. Suitable for wb enamels, varnishes and paints for construction, varnishes for wood and leather finishing.
BRILAX W	Emulsion	Hydrocarbons	24	Water-based	High	Medium / high	Low / medium / high	Low / medium	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam very stable also in systems with very low viscosity, characterized by good efficacy, easy to use and incorporate. Suitable for wb enamels, varnishes and paints for construction, varnishes for wood and leather finishing.
BRILAX T	Emulsion	Hydrocarbons	30	Water-based	High	Medium	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam very stable also in systems with very low viscosity, easy to use and incorporate. Suitable for wb enamels, varnishes and paints for construction, varnishes for wood and leather finishing.
BRILAX T2	Emulsion	Hydrocarbons	50	Water-based	High	Medium / high	Low / medium / high	Low / medium	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam very stable also in systems with very low viscosity, characterized by good efficacy, easy to use and incorporate. Suitable for wb enamels, varnishes and paints for construction, varnishes for wood and leather finishing.
BRILAX 500 I	Emulsion	Hydrocarbons	50	Non soluble	Low	Medium	Low / medium / high	High	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam and de-aerating agent suitable for glues and hydropaints.
BRILAX 500 W	Emulsion	Hydrocarbons	50	Water-based	High	High	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam and de-aerating, very stable also in systems with very low viscosity, characterized by good efficacy, easy to use and incorporate. Suitable for varnishes and paints for construction.
RIMAX 750 CO	Emulsion	Glycol	25	Water-based	High	Medium	Low / medium / high	Medium	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam, very stable also in systems with very low viscosity, characterized by good efficacy, easy to use and incorporate. Suitable for varnishes and paints for construction.
RIMAX 750	Emulsion	Glycol	25	Water-based	High	Medium	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam very stable also in systems with very low viscosity, characterized by good efficacy, easy to use and incorporate. Suitable for wb enamels, varnishes for furniture and parquet, and paints for construction, and leather finishing auxiliaries.
RIMAX 750 W	Emulsion	Glycol	30	Water-based	High	Medium	Low / medium / high	Low / medium	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam and de-aerating, very stable also in systems with very low viscosity, characterized by good efficacy, easy to use and incorporate. Suitable for wb enamels, varnishes and paints for construction.

ANTIFOAMS

ANTIFOAMS BASED ON HYDROCARBONS - **100% ACTIVE** SELF-EMULSIFYING IN WATER

PRODUCT	APPEARANCE	ACTIVE MATERIAL	% ACTIVE	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY OF SYSTEM	PVC TO TREAT	SYSTEMS TO TREAT	FEATURES
CHEROX 45	Fluid	Hydrocarbons	45	Water-based	Medium / high	High	Medium / high	Medium / high	Emulsion: acrylic / styrene-acrylic / vinyl	Antifoam with medium / high dispersibility, suitable for varnishes, paints and coatings for construction and having an excellent value for money. It is effective also at low dosages and it has a long-lasting stability.
CHEROX 99	Compound	Hydrocarbons / alchools	100	Water-based	High	Medium / high	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam of good efficacy. Suitable for many tasks: indoor and outdoor hydro paints, enamel and plaster for construction, flooring paints, auxiliaries for leather finishing.
CHEROX 100	Fluid	Hydrocarbons	100	Water-based	Medium / high	Medium / high	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	All-around antifoam, of good efficacy. Suitable for many tasks: indoor and outdoor hydro paints, enamel and plaster for construction, flooring paints, auxiliaries for leather finishing.
CHEROX 200	Fluid	Hydrocarbons	100	Water-based	High	Medium	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Highly dispersible antifoam 100%, suitable for many tasks: enamel, paints and plaster for construction, warnishes for furniture and parquet, auxiliaries for leather finishing, water-based inks and adhesives.
CHEROX 620	Compound	Hydrocarbons	100	Water-based	Medium	Very high	Low / medium / high	Low	Emulsions: acrylic / styrene-acrylic / vinyl / polyvinylacetate	Antifoam and de-aerating with high performance, effective at low dosage. Suitable for many applications: varnishes, paints, and plaster for construction, characterized by low pvc.
CHEROX 630	Compound	Hydrocarbons	100	Water-based	High	Medium / high	Low / medium / high	Low	Emulsions: acrylic / styrene-acrylic / vinyl / polyvinylacetate	Antifoam and de-aerating, very high performance at very low dosage. Suitable for many applications: varnishes, paints, and plaster for construction, characterized by low pvc.
CHEROX 701	Fluid	Hydrocarbons	100	Water-based	Medio / bassa	High	Medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam with low / medium disersability, suitable for varnishes and coatings for construction characterized by medium / high viscosity, glues and pastes.

ANTIFOAMS

ANTIFOAMS BASED ON HYDROCARBONS - **100% ACTIVE** SELF-EMULSIFYING IN WATER

PRODUCT	APPEARANCE	ACTIVE MATERIAL	% ACTIVE	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY OF SYSTEM	PVC TO TREAT	SYSTEMS TO TREAT	FEATURES
CHEROX 704	Fluid	Hydrocarbons	100	Water-based	Medium	High	Medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam with medium dispersability, suitable for glues and systems having medium / high viscosity, and good for many others applications, indoor / outdoor hydro paints and plasters, manufacturing of wax and emulsions, adhesives and printing pastes.
CHEROX 710	Fluid	Hydrocarbons	100	Water-based	Low	Very high	Medium / high	Low	Emulsions: acrylic / styrene-acrylic / vinyl / polyvinylacetate	Antifoam having low dispersability and high effectiveness, suitable for varnishes, paints for cosntruction, pastes and glues characterized by medium / high viscosity.
CHEROX 731	Fluid	Hydrocarbons	100	Water-based	Medium	High	Medium / high	Low	Emulsions: acrylic / styrene-acrylic / vinyl / polyvinylacetate	Antifoam having medium dispersability and good effectiveness, suitable for varnishes, paints for construction, pastes and glues characterized by medium / high viscosity.
CHEROX 450	Compound	Hydrocarbons / mineral oils	100	Water-based	High	High	Low / medium / high	Low	Emulsions: acrylic / styrene-acrylic / vinyl / polyvinylacetate	Antifoam having medium dispersability and good effectiveness, suitable for varnishes, paints for construction, pastes and glues characterized by medium / high viscosity, printing inks, rotogravure inks and flexographic inks.

POWDER ANTIFOAMS

SILICONE FREE

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	DISPERSIBILITY	EFFICACY	SYSTEMS TO TREAT	FEATURES
POLIBRIL 1500 S	Powder	Hydrocarbons	15	Good in water	Medium	Cement mixtures	Silicone powder antifoam both for aqueous systems and dry mixtures. It is a good de-aerating agent and antifoam.
POLIBRIL 1500 SF	Powder	Hydrocarbons	15	Good in water	Medium	Cement mixtures	Very high performance powder antifoam.
POLIBRIL 500	Powder	Hydrocarbons	50	No dispersible	High	Cement mixtures	Powder antifoam used as de-aerating agent in dry mixture. It works very well at a very low dosages. It has a good performance.
POLIBRIL 504	Powder	Hydrocarbons	40	No dispersible	High	Cement mixtures	Powder antifoam used as de-aerating agent in dry mixture. It works very well at a very low dosages. It has an excellent performance.
POLIBRIL 505	Powder	Hydrocarbons	40	No dispersible	High	Cement mixtures	Used as a de-aerating agent in dry mixture. It works very well at a very low dosages.
POLIVEG	Powder	Vegetable fatty acids	20	For dry mixtures ready to use	High	Direct / indirect contact formulations	Vegetable fatty acids based powder for animal glues. High performance even at low dosages and is used for direct contact with food.

ECO FRIENDLY ANTIFOAMS

IN WATER EMULSION AND **100% ACTIVE**

Chemistry, nature, and the environment: our most important partners

We are committed to protecting our planet: we have invested our efforts, time, and resources in formulating eco-friendly defoamers that have the lowest risk possible for the environment.

PRODUCT	APPEARANCE	ACTIVE MATERIAL	% ACTIVE	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY OF SYSTEM	PVC TO TREAT	SYSTEMS TO TREAT	FEATURES
FISIOREX 1000	Compound	Bio vegetal fatty acids	100	Water-based	High	Medium / high	Medium / high	Low / medium	Emulsions: acrylic / styrene-acrylic / vinyl / polyvinylacetate	Antifoam showing eccellent efficacy. It works at low dosages, suitable for different applications, like hydropaints, glues, adhesives. Particulary suitable for green / bio paints.
RIXAID 100	Compound	Vegetal fatty acids	100	Water-based	High	Medium / high	Medium / high	Medium	Water based inks	Antifoam suitable for inks.
CPL 860 E	Compound	Vegetal fatty acids	100	Water-based	High	High	Medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Versatile antifoam, with very high dispersability in water sytems. Suitable within others for wb enamels, varnishes for acrylic / vinylic resins, concentrated pastes.
CPL 840	Compound	Vegetal fatty acids	100	Water-based	High	High	Low / medium / high	Low / medium	Emulsions: acrylic / styrene-acrylic / vinyl	Multifunctional antifoam, for diversified tasks, like wb enamels, varnishes for furniture and parquet, printing inks and pigment pastes.
CHEROX 888	Compound	Vegetal fatty acids	100	Water-based	High	High	Low / medium / high	Low / medium	Emulsions: acrylic / styrene-acrylic / vinyl	Multifunctional antifoam, for diversified tasks, like wb enamels, varnishes for furniture and parquet, printing inks and pigment pastes.
CPL 250	Emulsion	Vegetal fatty acids	25	Water-based	High	Medium	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam characterized by excellent stability. Easy to use, suitable for many tasks, like wb enamels, varnishes for wood, glues and adhesives and specifically for cement mixtures.
CPL 250 W	Compound	Vegetal fatty acids	25	Water-based	High	Medium / high	Low / medium / high	Medium / high	Emulsions: acrylic / styrene-acrylic / vinyl	Antifoam showing very good efficacy. Stable in all sytems, suitable for different applications, like wb enamels, varnishes for wood, glues and adhesives and specifically for cement mixtures
POLIVEG	Powder	Vegetal fatty acids	20					Low / medium	Direct / indirect food formulations	Vegetable fatty acid powder for animal glues. It is efficient at low dosages. Suitable for food contact products.

ANTIFOAMS

ANTIFOAMS FOR SOLVENT BASED SYSTEMS

PRODUCT	APPEARANCE	ACTIVE MATERIAL	SYSTEM TO TREAT	FEATURES
AS 1°	Solvent solution	Modified silicone	Acetone	Easy dispersable in acetone based systems. Quick and lasting antifoam activity.
AS 4°	Solvent solution	Modified silicone of new generation	White spirit / water	Prepared with latest modified silicones, showing quick and lasting antifoam activity. Self-emulsifying in water, white spirit and alike hydrocarbions solvents.
AS 5°	Solvent solution	Modified silicone of new generation	Ethyl / buthyl acetate	Prepared with latest modified silicones, showing quick and lasting antifoam activity. Soluble and stable in acetatae based systems, showing quick and lasting antifoam activity.
AS 6°	Solvent solution	Modified silicone of new generation	White spirit and similar solvents	Prepared with latest modified silicones, showing quick and lasting antifoam activity. Easy dispersable in white spirit and alike solvents based systems, showing quick and lasting antifoam activity.
AS 9°	Solvent solution	Modified silicone of new generation	White spirit / water	Self-emulsifying in water, white spirit and alike solvents based systems. Fully prepared with lastest modified silicones.
AS 100	100 % Active	Modified silicone	Ethyl / buthyl acetate / wgihite spirit and similar solvents	100% Active antifoam, with an eccellent and long-lasting effect. Suitable as base for a variety of applications.
DYNAWEED 101	100 % Active	Modified silicone of new generation	Buthyl-ethyl acetate / white spirit and similar solvents	Pure active, 100%, manufactured with lastest modified silicone, showing quick and lasting antifoam activity, suitable as base for a variety of applications.

HYDROREPELLENTS

IN POWDER

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	EFFECT	USAGES	SYSTEMS TO TREAT	FEATURES
POLISAR 600	Powder	Silane	60	Strong hydrorepellent effect	Water-repellent additive for construction materials	Cementitious mixtures	Water-repellent agent used in cement mixtures
POLISAR 600 R	Powder	Silane	60	Strong hydrorepellent effect	Water-repellent additive for construction materials	Cementitious mixtures	Water-repellent agent used in cement mixtures
POLISAR 600 RI	Powder	Silane	60	Very strong hydrorepellent effect	Water-repellent additive for construction materials	Cementitious mixtures	Water-repellent agent used in cement mixtures
BRILSAR 1000 MIP	Powder	Modified silicone	60	Strong hydrorepellent effect. Strong beading effect	In ready-to-use mixtures	Plasterboards	Water-repellent agent used in cement mixtures

WATER BASED AND SOLVENT BASED

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	EFFECT	USAGES	SYSTEMS TO TREAT	FEATURES
IDROREX 210	Aqueous dispersion	Fluorinated (meth)acrylic polymer	25	Very strong	Water- and oil-repellent and stain-resistant	Stone materials	Idrorepellente concentrato per pietre naturali, terracotta, calcestruzzo, mattoni, marmo
IDROREX 50	Aqueous dispersion	Fluorinated (meth)acrylic polymer	5	Strong	Water- and oil-repellent and stain-resistant	Stone materials	Idrorepellente per pietre naturali, terracotta, calcestruzzo, mattoni, marmo
AGUAREX R	Aqueous dispersion	Fluorinated (meth)acrylic polymer/silicone	16	Strong	Water- and oil-repellent and stain-resistant	Stone materials	Water repellent for natural stone, terracotta, concrete, brick, and marble
OLEOREX	Solvent dispersion	Fluorinated (meth)acrylic polymer	25	Very strong	Water- and oil-repellent and stain-resistant	Stone materials	Water repellent for natural stone, terracotta, concrete, brick, and marble
OLEOREX 50	Solvent dispersion	Fluorinated (meth)acrylic polymer	1.25	Strong	Water- and oil-repellent and stain-resistant	Stone materials	Water repellent for natural stone, terracotta, concrete, brick, and marble
SILWALL PRF SUPER	Solvent dispersion	Reactive silicone	95	Very strong	Water repellent	Absorbent building materials	Concentrated water repellent for porous building materials
SILWALL PR	Solvent dispersion	Reactive silicone	7.5	Strong	Water repellent	Absorbent building materials	Concentrated water repellent for porous building materials
BRILSAR 500	Emulsion	Silicone polymer Of new generation	55	Very strong	Water repellent for porous substrates or additive for acrylic water-based paints	Concrete supports	Water proof additive used inside cement mixtures
BRILSAR 550 R	Emulsion	Silicone polymer Of new generation	55	Very strong	Water repellent for porous substrates or additive for acrylic water-based paints	Concrete supports + hydropaints	Water proof additive used inside cement mixtures
BRILSAR 403	Emulsion	Silicone / silane	50	Strong	Water repellent for porous substrates or additive for acrylic water-based paints	Concrete supports	Water proof additive used inside cement mixtures
MIP 15 C	Fluid	Silicone / silane	100	Very strong	Water repellent for plaster	Plasters	Water proof additive used in plaster-based mixtures

WAXES

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	IONIC BEHAVIOR	WAX MELTING POINT	SOLVENT	APPEARANCE
CARNAUBEX C	Emulsion	Carnauba wax	18	Cationic	82°C	Water	Due to its cationic behavior it shows a very good affinity with the material is applied on. Good water-repellent feature, and excellent stability once added to various sytems.
CARNAUBEX 442	Emulsion	Carnauba wax	45	Non ionic	82°C	Water	Very much stable in the water based systems where is added. Good water-repellent feature, it tends to leave a toning effect.
WASPER D	Emulsion	Beeswax	25	Non ionic	65°C	Water	Very much stable in the water based systems where is added. Good water-repellent feature, it tends to leave a soft and light toning effect.
POLYEMUL 800/38	Emulsion	Paraffin wax	38	Non ionic	58°C	Water	Very much stable in the water based systems where is added. Good water-repellent feature, is largely used in outdoor wb paints manufacturing.
POLYEMUL TS	Emulsion	Paraffin wax	50	Anionic	53°C	Water	Very much stable in the water based systems where is added. Good water-repellent feature, it is largely used in outdoor wb paints manufacturing.
IDROCER	Emulsion	Polyethylen wax	25	Non ionic	90°C	Water	Very much stable in the water based systems where is added. Good water-repellent feature, it tends to leave a demi-rigid and pratically transparemt film.
IDROCER 1300	Microemulsion	Polyethylen wax	35	Non ionic	130°C	Water	Very much stable in the water based systems where is added. Excellent water-repellent feature, it tends to leave a demi-rigid and pratically transparent film.
IDROCER SH	Microemulsion	Transparent polyethylene wax	35	Non ionic	130°C	Water	Very much stable in the water based systems where is added. Excellent water-repellent feature, it tends to leave a semi-rigid and practically transparent film. It is particularly high-performant.

SILICONE RESINS FOR HIGH TEMPERATURE

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	SOLVENT	FEATURES
RESINGUM 700 S	Solvent solution	Methyl Phenyl Silicone Resin	75	Xylene	Special silicone resin dispersed in xylene, used to improve the thermal resistance of varnishes based on xylene or compatible solvents. Suitable to prepare varnishes for stoves, fireplaces, mufflers and metals exposed to high temperature.
RESINGUM 500	Emulsion	Methyl Phenyl Silicone Resin	50	Water	Special silicone resin dispersed in water, used to improve the thermal resistance of water based varnishes. Suitable to prepare varnishes for stoves, fireplaces, mufflers and metals exposed to high temperature.

SILICONE FREE ANTIFOAMS FOR GLUES

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	SYSTEM	DISPERSIBILITY	EFFICACY	VISCOSITY	FEATURES
CPL 2907	Fluid	Alcohols	100	Water-based	High	High	Low / medium / high	Antifoam characterized by high self-emulsification behavior. Very suitable for the preparation of glues, wax emulsions.
CPL 2907 P	Fluid	Alcohols	100	Water-based	High	Very high	Low / medium / high	Antifoam characterized by high self-emulsification behavior and high performance. Very suitable for the preparation of glues, wax emulsions.
EPROTEX 250	Emulsion	Alcohols	25	Water-based	Very high	Medium / low	Low	Antifoam emulsion very suitable for the preparation of glues, wax emulsions. It was specifically formulated for adhesion problems.
CHEROX 200	Fluid	Hydrocarbons	100	Water-based	High	Medium	Low / medium / high	Highly dispersible antifoam 100%, suitable for many tasks: enamel, paints and plaster for construction, warnishes for furniture and parquet, auxiliaries for leather finishing.

WETTING - LEVELLING - SURFACE TENSION MODIFIERS - ANTIFOAMS

PRODUCT	APPEARANCE	ACTIVE MATERIAL	%	SYSTEMS TO TREAT	PRODUCT
TENSIOTEX 553	Dispersion	Special polymer	50	Water / glycol / solvents	Particular active material, easy and quickly dispersable in water, glycols and some solvents, stable and showing very low viscosity. It well decrease the surface tension.
CPL 2904	Fluid	Special polymer	100	Water / glycol / solvents	Special wetting with antifoam behavior. Is very suitable for the preparation of wb and ceramic enamels, and some kind og glues.
DYNAWEED 2-100	Fluid	Modified silicone	100	Water / glycol / solvents	Special polyether silicone, self-emulsifying in water, showing a strong wetting and surface-tension depressing actions. Suitable for some glycol or hydrocarbon solvents based systems.
DYNAWEED 510	Fluid	Modified silicone	100	Water / glycol / solvents	Special polyether silicone, fully stable and soluble in water, showing a strong wetting, levelling and surface-tension depressing actions. Suitable for some glycol or hydrocarbon solvents based systems.

CAR CARE

PRODUCT	APPEARANCE	%	USAGES	EFFECT	FEATURES
BEAUTY CAR	Water emulsion	10	Special formulation based upon modified silicones as water emulsion. Ready to use	Shining, protective, hydro-repellent, rinse aid, equalizer	Used as supplied. It is applied over the car's body, then shiny pulled with a rag or a polisher machine.
BEAUTY CAR CONC.	Water emulsion	40	Special formulation based upon modified silicones as water emulsion. Base for the preparation of formulates	Shining, protective, hydro-repellent, rinse aid, equalizer. DEGREASER	Product addressed to formulators. To be diluted at least 1:3 with water and used as a base to prepare formulations for "cosmetic" apperance of car body.
REOWASS 500 S	Dispersion in propyl glycol	50	Formulation based upon a special silicone additive dispersed in propyl glycol	Increase the performance and the speed of drying on a car's body treated in washing tunnels. Shining and hydro-repellent effect.	Product addressed to formulators. Used as additive to prepare formulation for automatic car wash and for "cosmetic" apperance of car body.
REOWASS 350 S	Water microemulsion	35	Special microemulsion of a modified amino-functional siloxane	Increase the performance and the speed of drying on a car's body treated in washing tunnels. Shining and hydro-repellent effect.	Product addressed to formulators. Used as an additive to prepare formulations for automatic car wash and for the "cosmetic" appearance of the car body. The product adheres better to the car body and withstands more washes.
MICROAMISIL 41	Water microemulsion	41	Special microemulsion of a reactive silicone. It has remarkable hydro-repellent, shining and equalizer features	Shining, hydro-repellent, equalizer. Resistant to washing	Product addressed to formulators. Used as additive to prepare formulations for "cosmetic" apperance of car body and leather components.
MICROAMISIL C	Water microemulsion	40	Special microemulsin of a high reactive silicone. It has remarkable and long lasting hydro-repellent, shining and equalizer features	Shining, hydro-repellent, equalizer. Resistant to washing, long lasting	Product addressed to formulators. Used as additive to prepare formulations for "cosmetic" apperance of car body. It creates a covering and flexible thick film.
EVERSIL 3.5	Water emulsion	35	Water emulsion of silicone (PDMS) of short chain	Mild hydro-repellency; mild equalizer; strong shining and rinse aid	Product addressed to formulators. Used as additive to prepare formulations for "cosmetic" apperance of car body and cockpit shine.
EVERSIL 6.0	Water emulsion	60	Water emulsion of silicone (PDMS) of short chain	Mild hydro-repellency; mild equalizer; strong shining and rinse aid	Product addressed to formulators. Used as additive to prepare formulations for "cosmetic" apperance of car body and cockpit shine. Low viscosity easy application.
EVERSIL 35	Water emulsion	35	Water emulsion of silicone (PDMS) of medium chain	Hydro-repellency; equalizer; shining and rinse aid	Product addressed to formulators. Used as additive to prepare formulations for "cosmetic" apperance of car body; cockpit and car band shine; tyre renovator.

CAR CARE

PRODUCT	APPEARANCE	%	USAGES	EFFECT	FEATURES
EVERSIL 60	Water emulsion	60	Water emulsion of silicone (PDMS) of medium chain	Hydro-repellency; equalizer; shining and rinse aid	Product addressed to formulators. Used as additive to prepare formulations for “cosmetic” apperance of car body; cockpit and car band shine; tyre renovator.
EVERSIL 350	Water emulsion	35	Water emulsion of silicone (PDMS) of long chain	Good hydro-repellency; good equalizer; good shining; mild rinse aid	Product addressed to formulators. Used as additive to prepare formulations for “cosmetic” apperance of car body; cockpit and car band shine; tyre renovator.
EVERSIL 3500	Water emulsion	41	Water emulsion of silicone (PDMS) of very long chain	Good hydro-repellency; excellent equalizer; good shining; ideal for auto bundles	Product addressed to formulators. Used as additive to prepare formulations for “cosmetic” apperance of car body; cockpit and car band shine; tyre renovator.
LUBROWHITE	Water microemulsion	45	Water emulsion of liquid paraffine	Hydro-repellency; equalizer; shining and rinse aid. Overpaintable	Product addressed to formulators. Used as additive to prepare formulations for “cosmetic” apperance of car body; cockpit and car band shine; tyre renovator.
AMISIL 501	Dispersion in alcohol	50	Special dispersion of silicone reactive to air, in aliphatic solvents and isopropyl alcohol	Hydro-repellency; equalizer; resistance to washing, long lasting	Product addressed to formulators. Used as additive to prepare formulations of special polishes and wax for car bodies.
CARNAUBEX 442	Hazelnut color emulsion	45	Carnauba wax emulsion	Additive for the production of wax and polishes for tyres, cockpit and car band	It creates a covering and flexible film. It enhances the original colors of cockpit and car band shine; tyre renovator.
CARNAUBEX C	Hazelnut color emulsion	18	Carnauba wax emulsion with cationic character	Additive for the production of wax and polishes for tyres cockpit and car band	It creates a covering and flexible film over. It enhances the original colors. The cationic nature increase strongly the adhesion over the support.

Silitex®
High technology emulsion

Ed. 01/2026

Viale Industria, 34
37044 Cologna Veneta (VR) Italy
Tel. (+39) 0442 411561
Fax (+39) 0442 411562
international@silitex.it
www.silitex.it